Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - CM10

CM10 - YEL

Resilient Core Type	
YEL	Yellow
RED	Red
BLK	Black
Other duro available on request	

SPECIFICATION:

Dimensions	Metric (mm)	Imperial (in)
Diameter	30	1.18
Height	40	1.57
Bolt diameter	M10	M10

Weight	Metric (kg)	Imperial (lb)
CM10	0.04	0.09

Recommended working load per mount	Metric (kg)	Imperial (lb)
CM10-YEL	1-30	2-66
CM10-RED	15-50	33-110
CM10-BLK	40-80	88-176

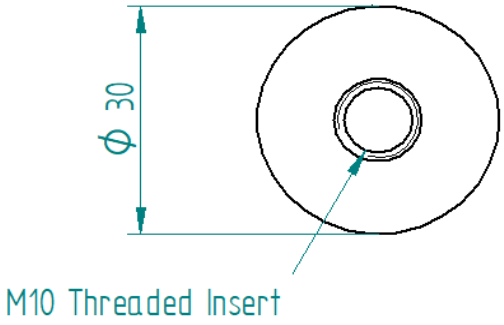

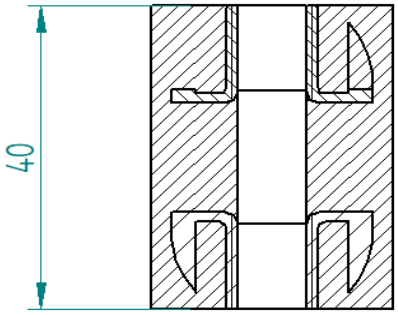

Copyright © 2023 Isoflex Technologies Pty Ltd

Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - CM10

Loading Type: Axial - Vertical Down (A-direction)



Resilient Core Colour	Spring Rate at 2mm	
	(kg/cm)	(lb/in)
Yellow	165	925
Red	210	1175
Black	365	2045

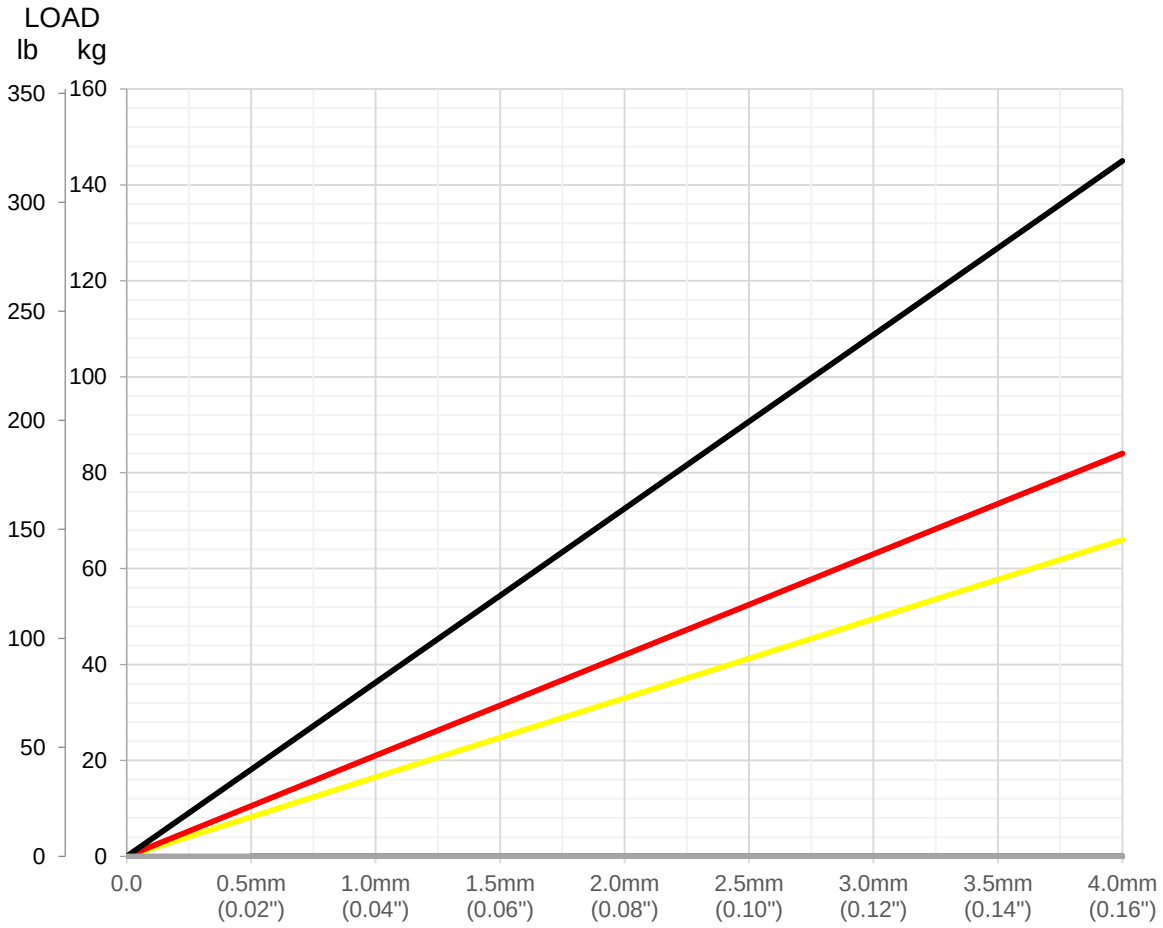

Graph: Static Axial Vertical Load [kg] (lb) versus Deflection [mm] (in)

Copyright © 2023 Isoflex Technologies Pty Ltd