Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - IFV130HD

IFV130HD - 20 S - RED

Thread Size	
20	M20
24	M24

Stud Type	
S	Adjusting stud type
B	Bolt type

Resilient Core Type	
RED	Red
ORG	Orange
BLK	Black
LBL	Light Blue
DBL	Dark Blue
GRN	Green
Other duro available on request	

Metal components a combination of marine alloy, stainless steel and components zinc plated to ASTM B633 Type II SC3

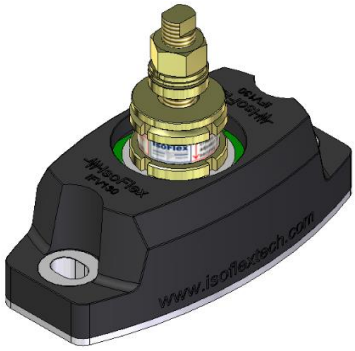

Mount model IFV130HD-20S or IFV130HD-24S



Mount model IFV130HD-20B or IFV130HD-24B

WEIGHT:

Model	Metric (kg)	Imperial (lb)
IFV130HD-20S	3.0	6.6
IFV130HD-24S	3.1	6.8
IFV130HD-20B	2.3	5.1
IFV130HD-24B	2.3	5.1

SPECIFICATION:

	Metric (kg)	Imperial (lb)
Recommended working load per mount	150-600	330-1320

Specifications are subject to change without notice.

Document: Isoflex-DS-IFV130HD-R8
Date: 30 Jan 2025
Copyright © 2025 Isoflex Technologies Pty Ltd

Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - IFV130HD

COMMON DIMENSIONS :

	Metric (mm)	Imperial (in)
Base length	230	9.06
Base width	110	4.33
Base bolt centres	182	7.17
Base thickness	30	1.18
Base bolt size	M16	5/8

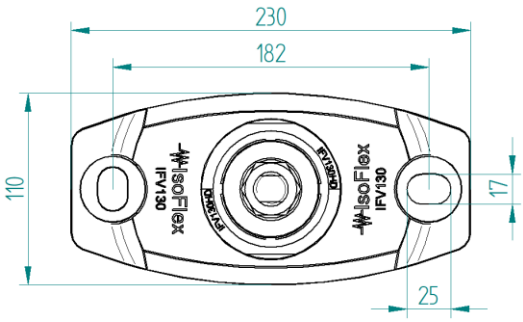

MODEL SPECIFIC DIMENSIONS :

	Overall Height (H)		Min Free Height (J)		Height Adjustment (J)	
Model	**(mm)**	**(in)**	**(mm)**	**(in)**	**(mm)**	**(in)**
IFV130HD-20S	170	6.69	110	4.33	10	0.39
IFV130HD-24S	200	7.87	110	4.33	10	0.39
IFV130HD-20B	-	-	90	3.54	-	-
IFV130HD-24B	-	-	90	3.54	-	-

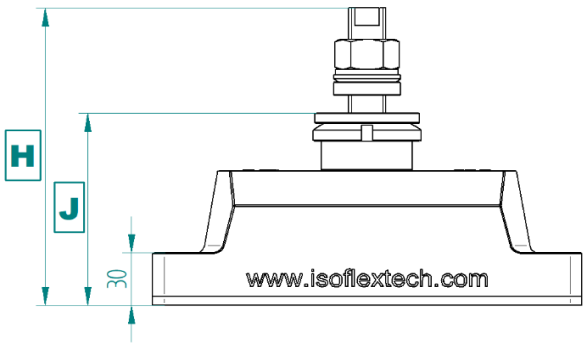

Mount model IFV130HD-20S or IFV130HD-24S

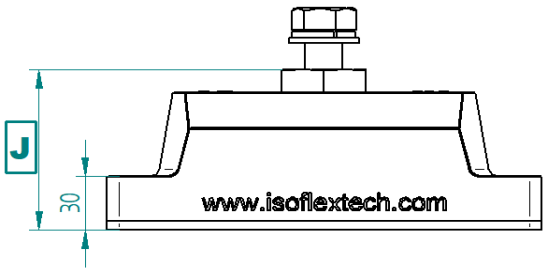

Mount model IFV130HD-20B or IFV130HD-24B

Specifications are subject to change without notice.

Document: Isoflex-DS-IFV130HD-R8
Date: 30 Jan 2025
Copyright © 2025 Isoflex Technologies Pty Ltd

Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - IFV130HD

Loading Type: Axial - Vertical Down (A-direction)

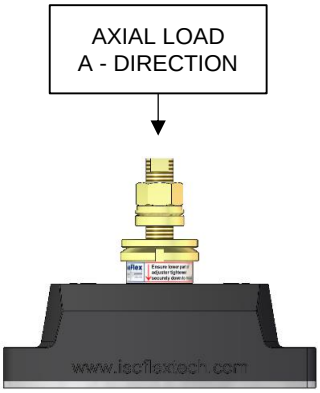

Resilient Core Colour	Spring Rate at 2mm	
	(kg/cm)	(lb/in)
Red	380	2130
Orange	710	3975
Black	1000	5600
Light Blue	1175	6580
Dark Blue	1450	8120
Green	1725	9660

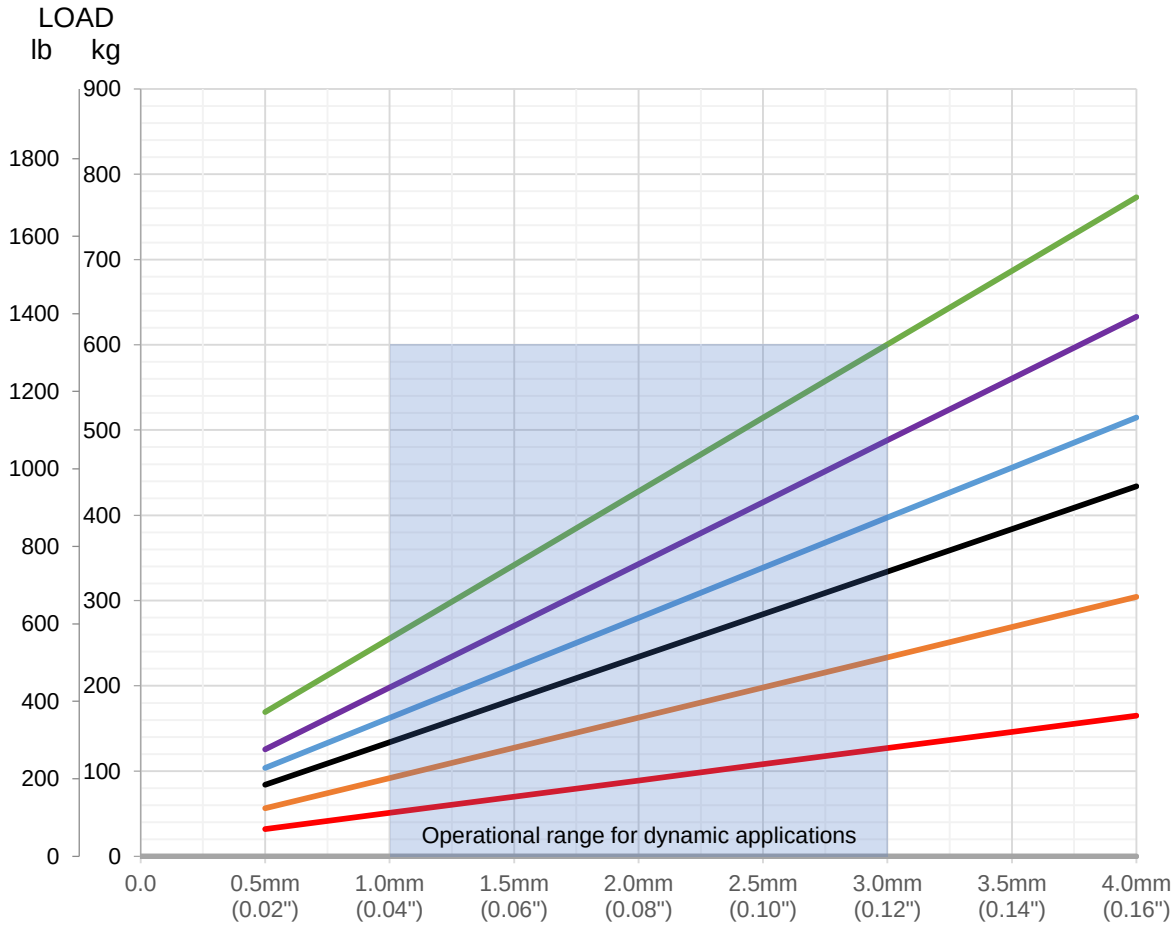

Graph: Static Axial Vertical Load [kg] (lb) versus Deflection [mm] (in)

Copyright © 2025 Isoflex Technologies Pty Ltd

Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - IFV130HD

Loading Type: Longitudinal Thrust (T-direction)

LONGITUDINAL THRUST
T - DIRECTION



Resilient Core Colour	Spring Rate at 2mm	
	(kg/cm)	(lb/in)
Red	6710	37575
Orange	6955	38950
Black	7085	39675
Light Blue	7150	40040
Dark Blue	7280	40770
Green	7365	41245

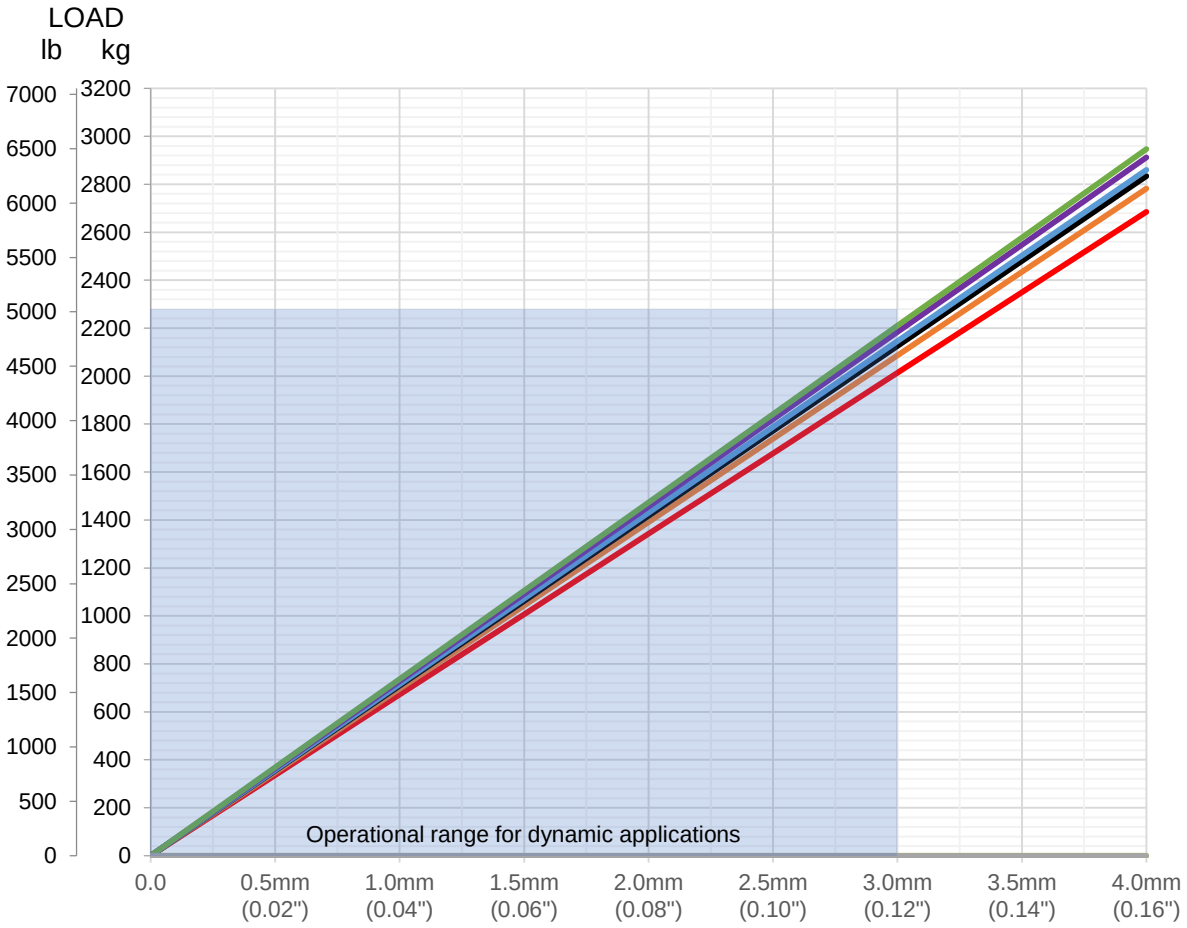

Graph: Static Longitudinal Load [kg] (lb) versus Deflection [mm] (in)

Note: Stated spring rate with 2.5mm axial compression simulation load

Specifications are subject to change without notice.

Document: Isoflex-DS-IFV130HD-R8
Date: 30 Jan 2025
Copyright © 2025 Isoflex Technologies Pty Ltd

Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - IFV130HD

Loading Type: Lateral (L-direction)

LATERAL LOAD
L - DIRECTION



Resilient Core Colour	Spring Rate at 1mm	
	(kg/cm)	(lb/in)
Red	300	1680
Orange	410	2295
Black	520	2910
Light Blue	715	4005
Dark Blue	915	5125
Green	1115	6245

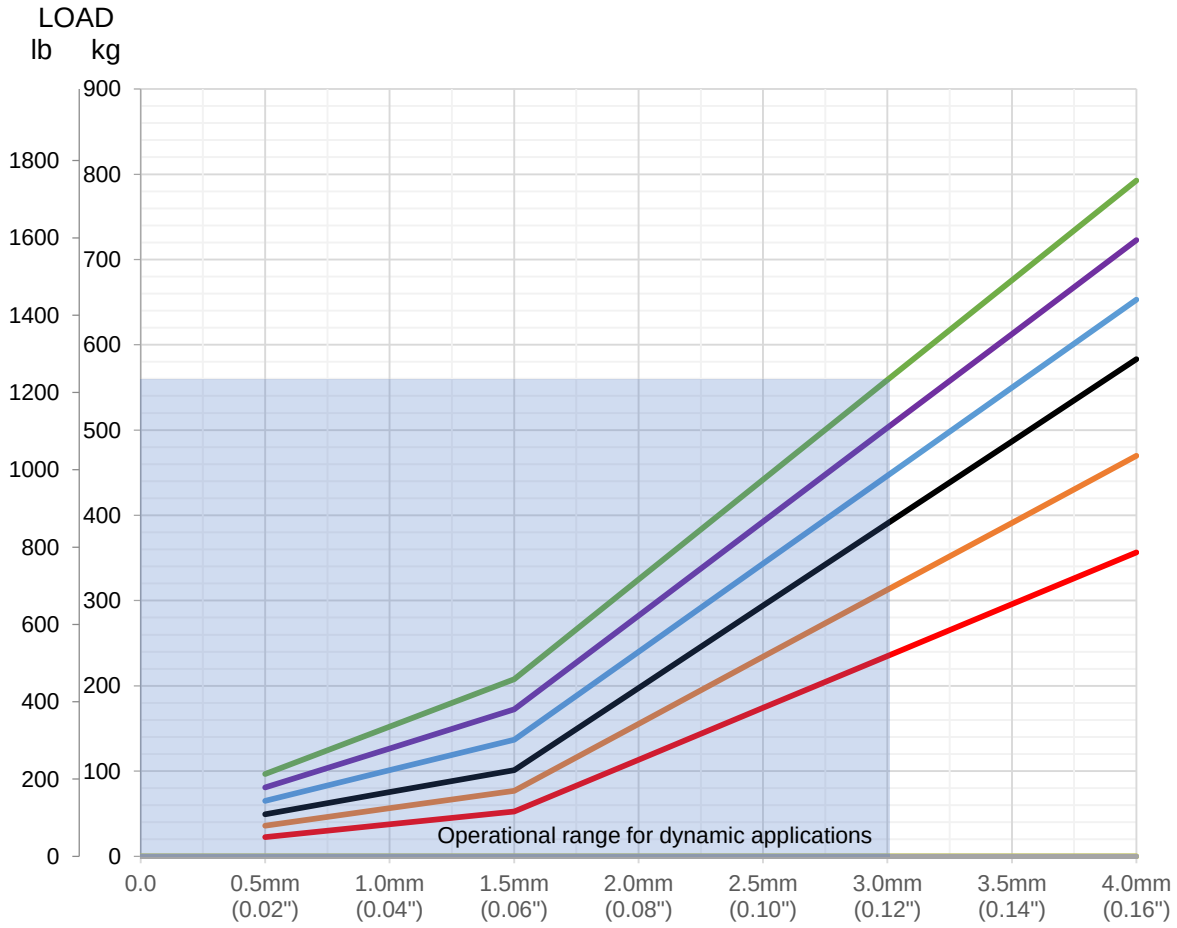

Graph: Static Lateral Load [kg] (lb) versus Deflection [mm] (in)

Note: Stated spring rate with 2.5mm axial compression simulation load

Copyright © 2025 Isoflex Technologies Pty Ltd

Isoflex Technologies Pty Ltd
11/75 Waterway Drive
Coomera, QLD 4209 AUSTRALIA
Ph: +61 7 5556 0924
E: info@isoflex.com.au

Isoflex Technologies International, LLC
3434 SW 15th Street
Deerfield Beach, FL 33442 U.S.A.
Ph: 561-210-5170
E: info@isoflextech.com

ISOFLEX MOUNT DATA SHEET - IFV130HD

Loading Type: Inverted - Vertical Up (I-direction)

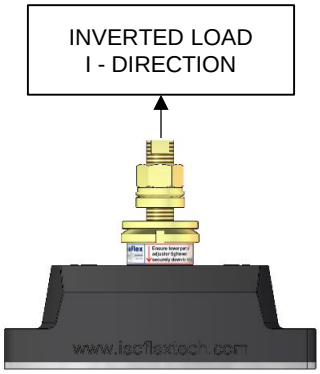

Resilient Core Colour	Spring Rate at 2mm	
	(kg/cm)	(lb/in)
Red	2205	12350
Orange	2575	14420
Black	3260	18255
Light Blue	3750	21000
Dark Blue	3935	22035
Green	4475	25060

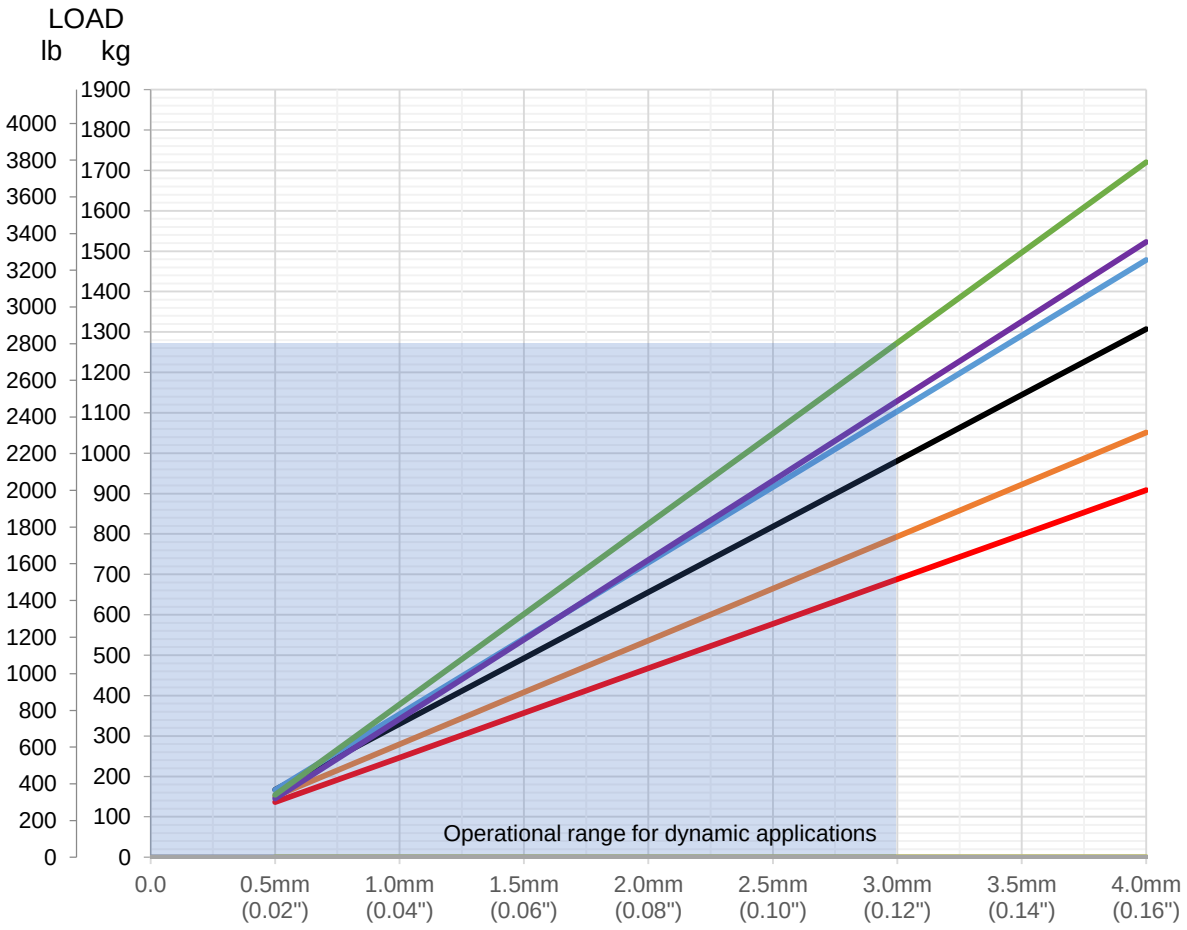

Graph: Static Inverted Load [kg] (lb) versus Deflection [mm] (in)

Specifications are subject to change without notice.

Document: Isoflex-DS-IFV130HD-R8
Date: 30 Jan 2025
Copyright © 2025 Isoflex Technologies Pty Ltd