

Gearbox output flange side

Propeller flange side

$\frac{7}{16}$ " UNF Hex Bolts - AS2465 Grade 5 Zinc Plated



Bolt Shear Capacity 'Thread' [BSC] = 36kN
 Bolt Pattern Shear Capacity [BPSC] = 7,772 Nm
 Bolt Pattern Design Torque [BPDT] = 1,943 Nm

$BDPT = \frac{1}{4} \times BPSC$

IFC-4550-95 Coupling Ratings:
 Pleasure craft = 740 Nm
 Intermediate = 650 Nm
 Continuous = 435 Nm

IFC-4550-95 Coupling Weight = 1.2 kg

IFC-4550-95

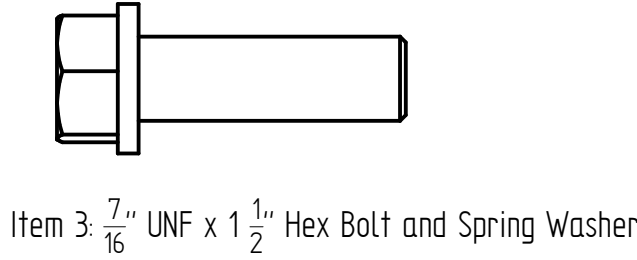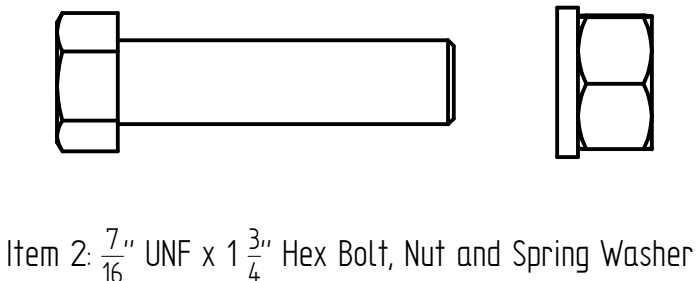

Copyright © 2020 Isoflex Technologies Pty Ltd			
TITLE		IFC4550-95 General Arrangement	
	NAME	DATE	
DRAWN	Matthew McCart	05/Nov/20	
CHECKED	-	-	
APPR	-	-	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		SIZE	DWG NO
		A3	IFC4550-95
			REV B1
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE		FILE NAME: IFC4550-95 General Arrangement_B1.dft	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	

