

SECTION A-A


$\frac{7}{16}$ " UNF Hex Bolts - AS2465 Grade 5 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 36kN
 Bolt Pattern Shear Capacity [BPSC] = 10,630 Nm
 Bolt Pattern Design Torque [BPDT] = 2,658 Nm


$BDPT = \frac{1}{4} \times BPSC$

IFC-6000-95 Coupling Ratings:
 Pleasure craft = 1,575 Nm
 Intermediate = 1,375 Nm
 Continuous = 925 Nm

IFC-6000-95 Coupling Weight = 1.6 kg

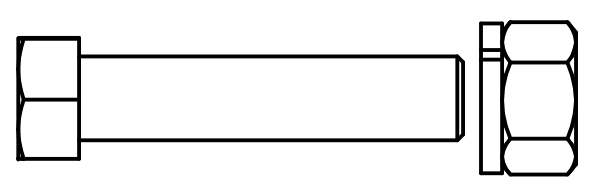


Item 2: $\frac{7}{16}$ " UNF x 2" Hex Bolt, Nut and Spring Washer

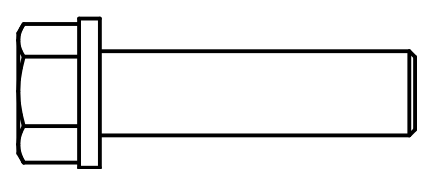

Item 3: $\frac{7}{16}$ " UNF x 1 $\frac{3}{4}$ " Hex Bolt and Spring Washer

IFC-6000-95



Copyright © 2020 Isoflex Technologies Pty Ltd			
TITLE		IFC6000-95 General Arrangement	
	NAME	DATE	
DRAWN	Matthew McCart	14/Oct/20	
CHECKED	-	-	
APPR	-	-	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		SIZE	DWG NO
		A3	IFC6000-95
		REV	B1
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE			
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	

