Item 1: High Tensile Engineering Polymer Disc

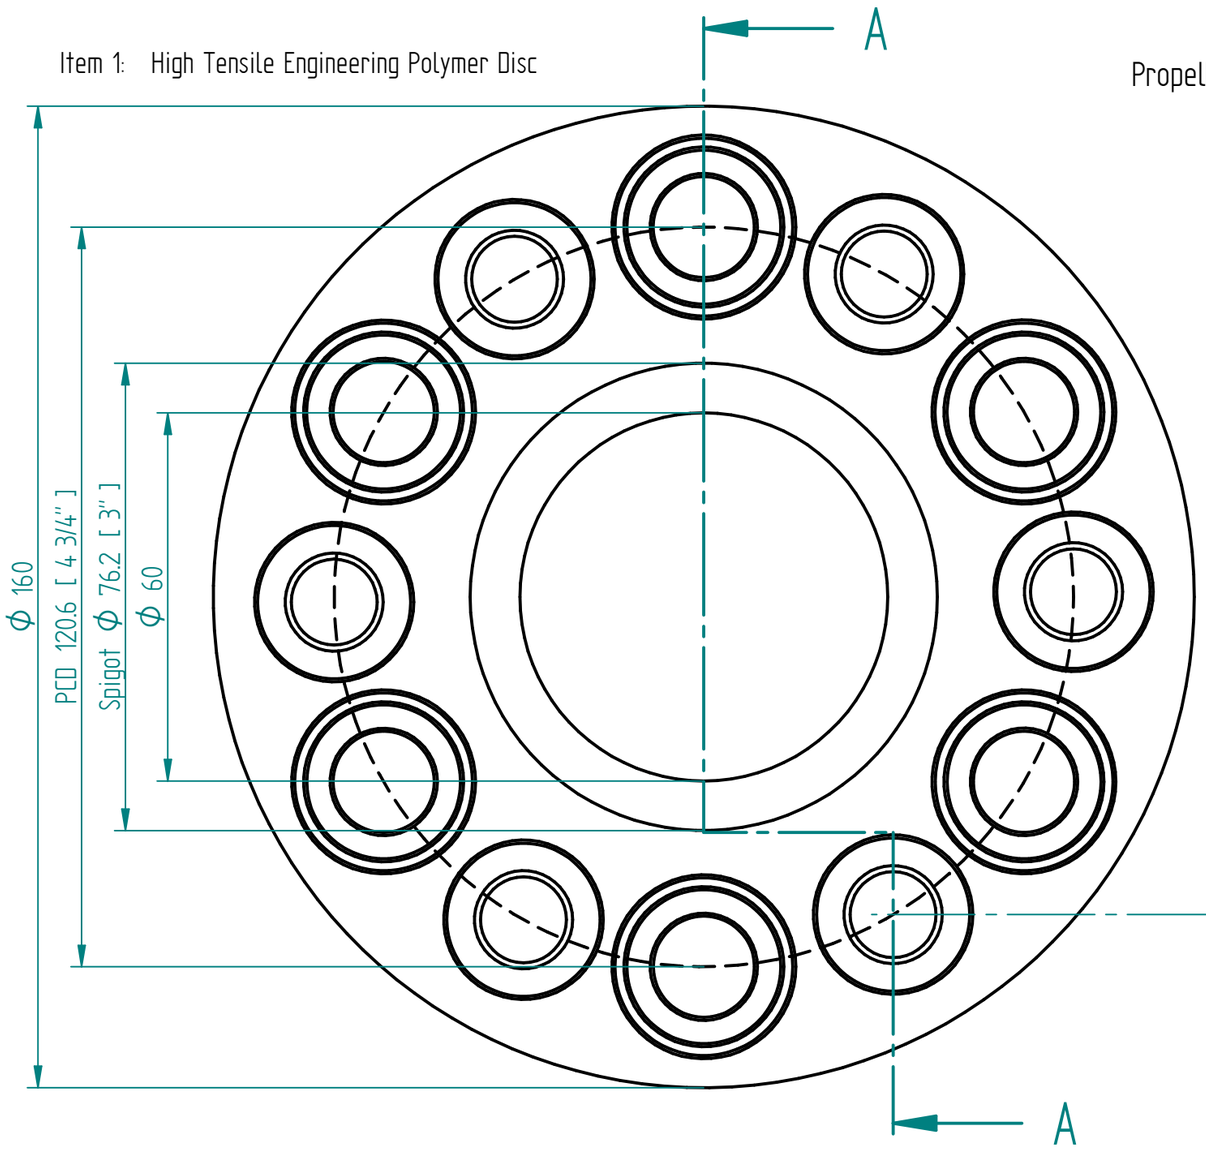

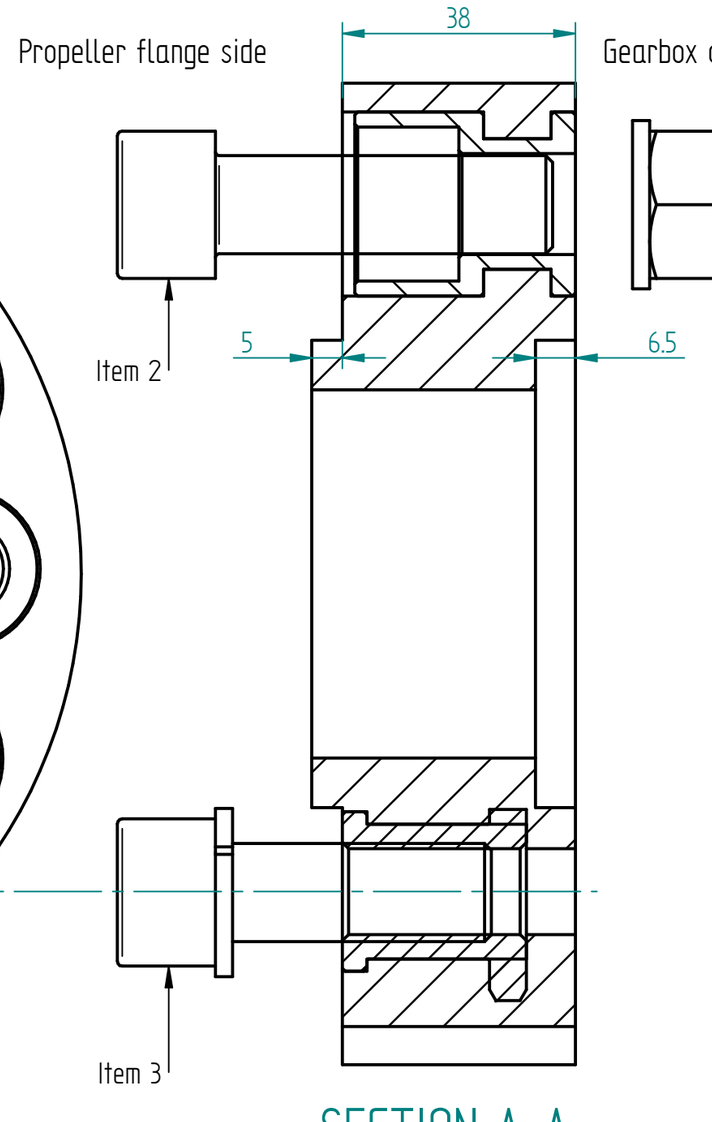

SECTION A–A

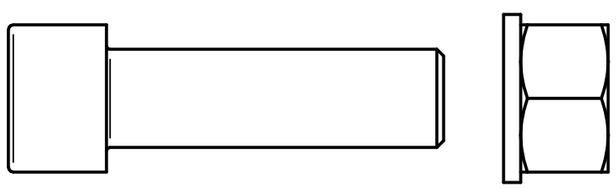

Item 2: M16 x 55 SHCS, Nut and Spring Washer

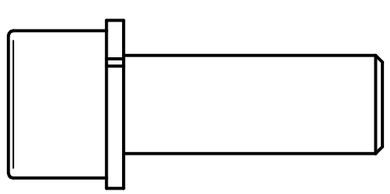

Item 3: M16 x 45 SHCS and Spring Washer

M16 SHCS – AS2465 Grade 8 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 96kN
Bolt Pattern Shear Capacity [BPSC] = 21,946 Nm
Bolt Pattern Design Torque [BPDT] = 5,486 Nm

$BDPT = \frac{1}{4} \times BPSC$

IFC-6150-95 Coupling Ratings:
Pleasure craft = 5,175 Nm
Intermediate = 4,575 Nm
Continuous = 3,050 Nm

IFC-6150-95 Coupling Weight = 3.1 kg
Mass Moment of Inertia I = 0.01116 kg.m^2
Average Torsional Stiffness = 219321 Nm/rad

IFC-6150-95

Copyright © 2024 Isoflex Technologies Pty Ltd

TITLE	IFC6150-95 General Arrangement	
	NAME	DATE
DRAWN	Matthew McCart	03/Apr/24
CHECKED	–	–
APPR	–	–

IsoFlex™ MINIMIZING VIBRATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	DWG NO	REV
A3	IFC6150-95	B3

FILE NAME: IFC6150-95_B3.dft

SCALE: 1:1	WEIGHT:	SHEET 1 OF 1