Item 1: High Tensile Engineering Polymer Disc

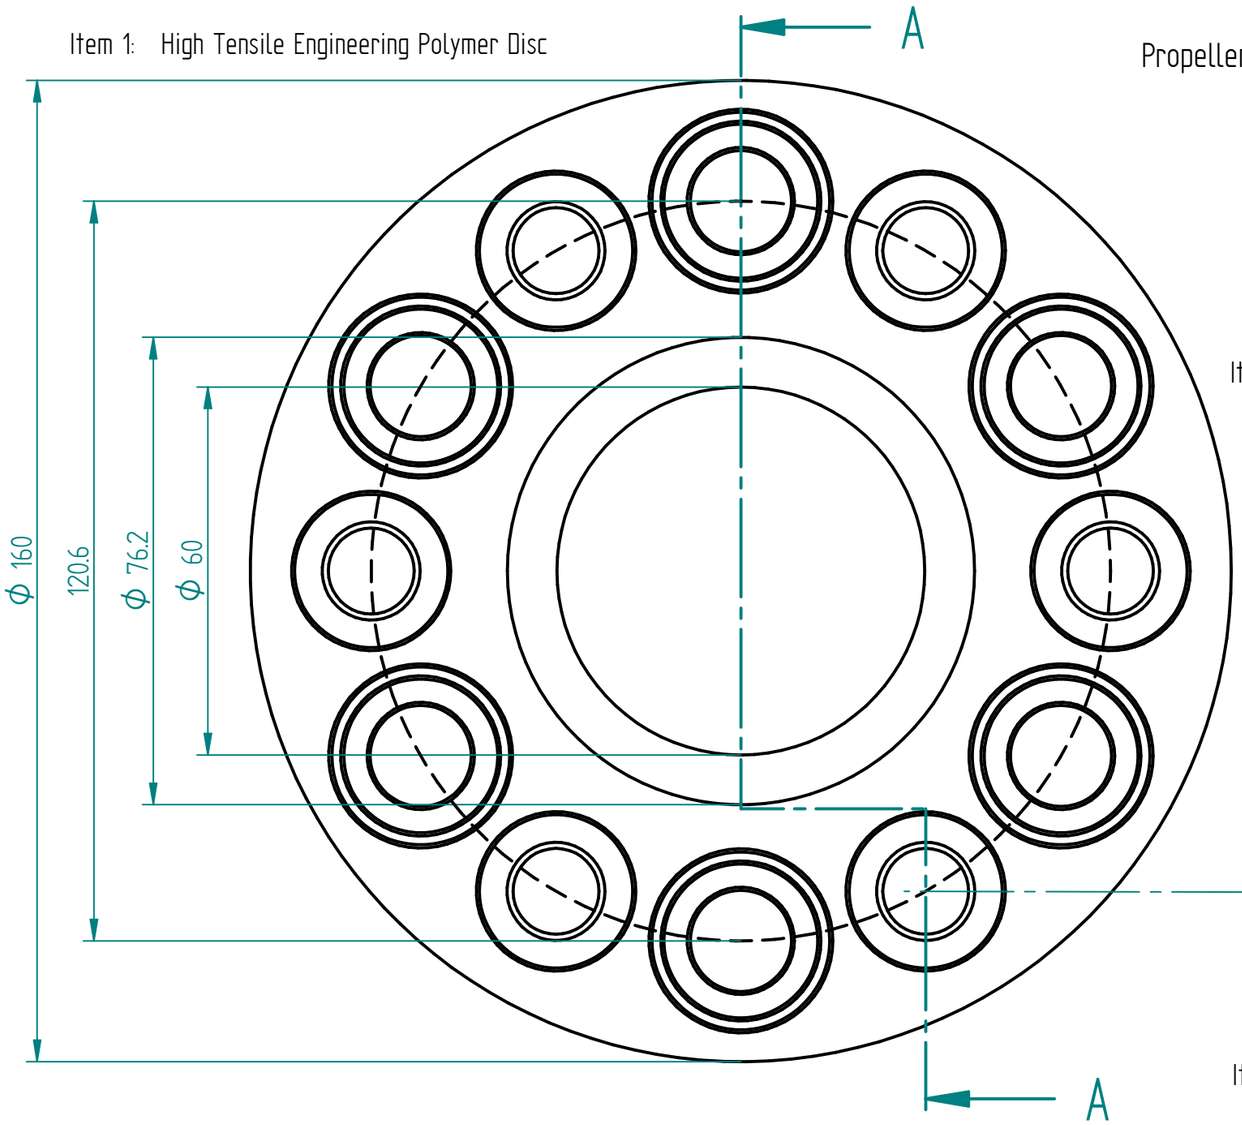

Propeller flange side

Gearbox output flange side

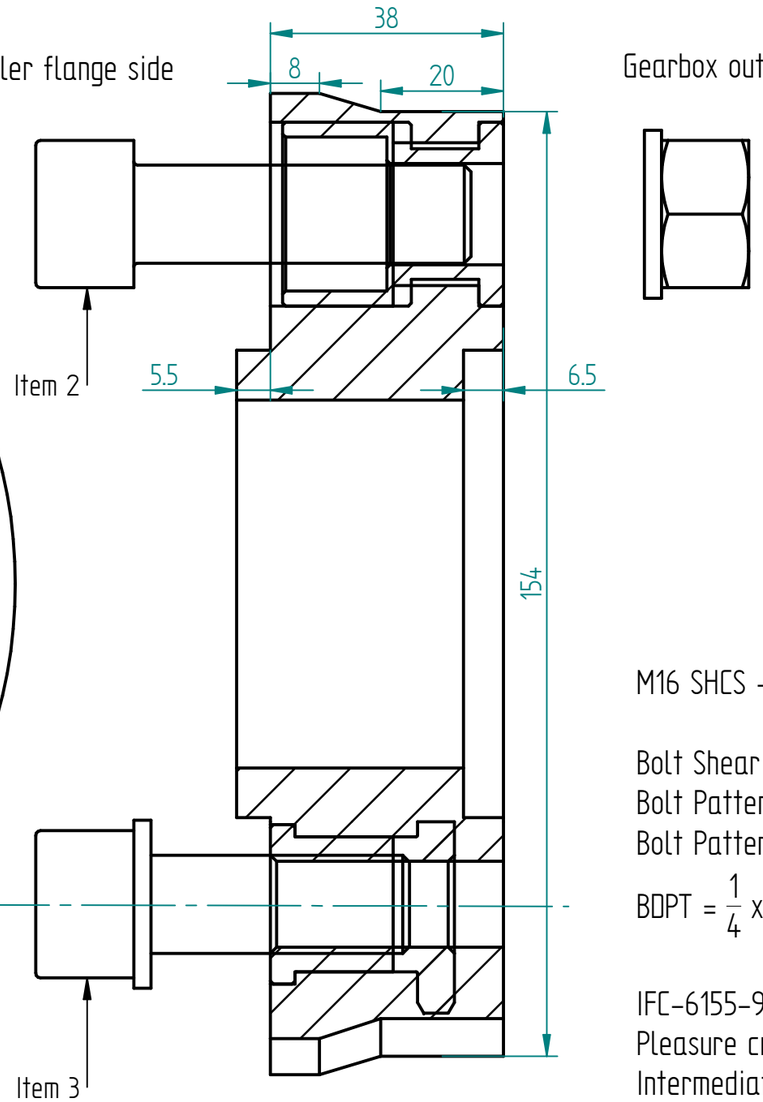

SECTION A-A

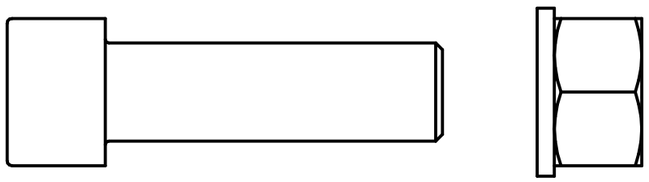

Item 2: M16 x 55 SHCS, Nut and Spring Washer

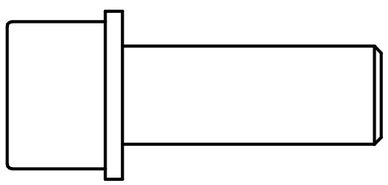

Item 3: M16 x 45 SHCS and Spring Washer

M16 SHCS - AS2465 Grade 8 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 96kN
Bolt Pattern Shear Capacity [BPSC] = 21,946 Nm
Bolt Pattern Design Torque [BPDT] = 5,486 Nm

$BDPT = \frac{1}{4} \times BPSC$

IFC-6155-95 Coupling Ratings:
Pleasure craft = 5,175 Nm
Intermediate = 4,575 Nm
Continuous = 3,050 Nm

IFC-6155-95 Coupling Weight = 3.0 kg

IFC-6155-95

Copyright © 2020 Isoflex Technologies Pty Ltd

TITLE	IFC6155-95 General Arrangement	
	NAME	DATE
DRAWN	Matthew McCart	15/Jan/21
CHECKED	-	-
APPR	-	-

IsoFlex™ MINIMIZING VIBRATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	SIZE	DWG NO	REV
	A3	IFC6155-95	B3
	FILE NAME: IFC6155-95_B3.dft		
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1