Item 1: High Tensile Engineering Polymer Disc

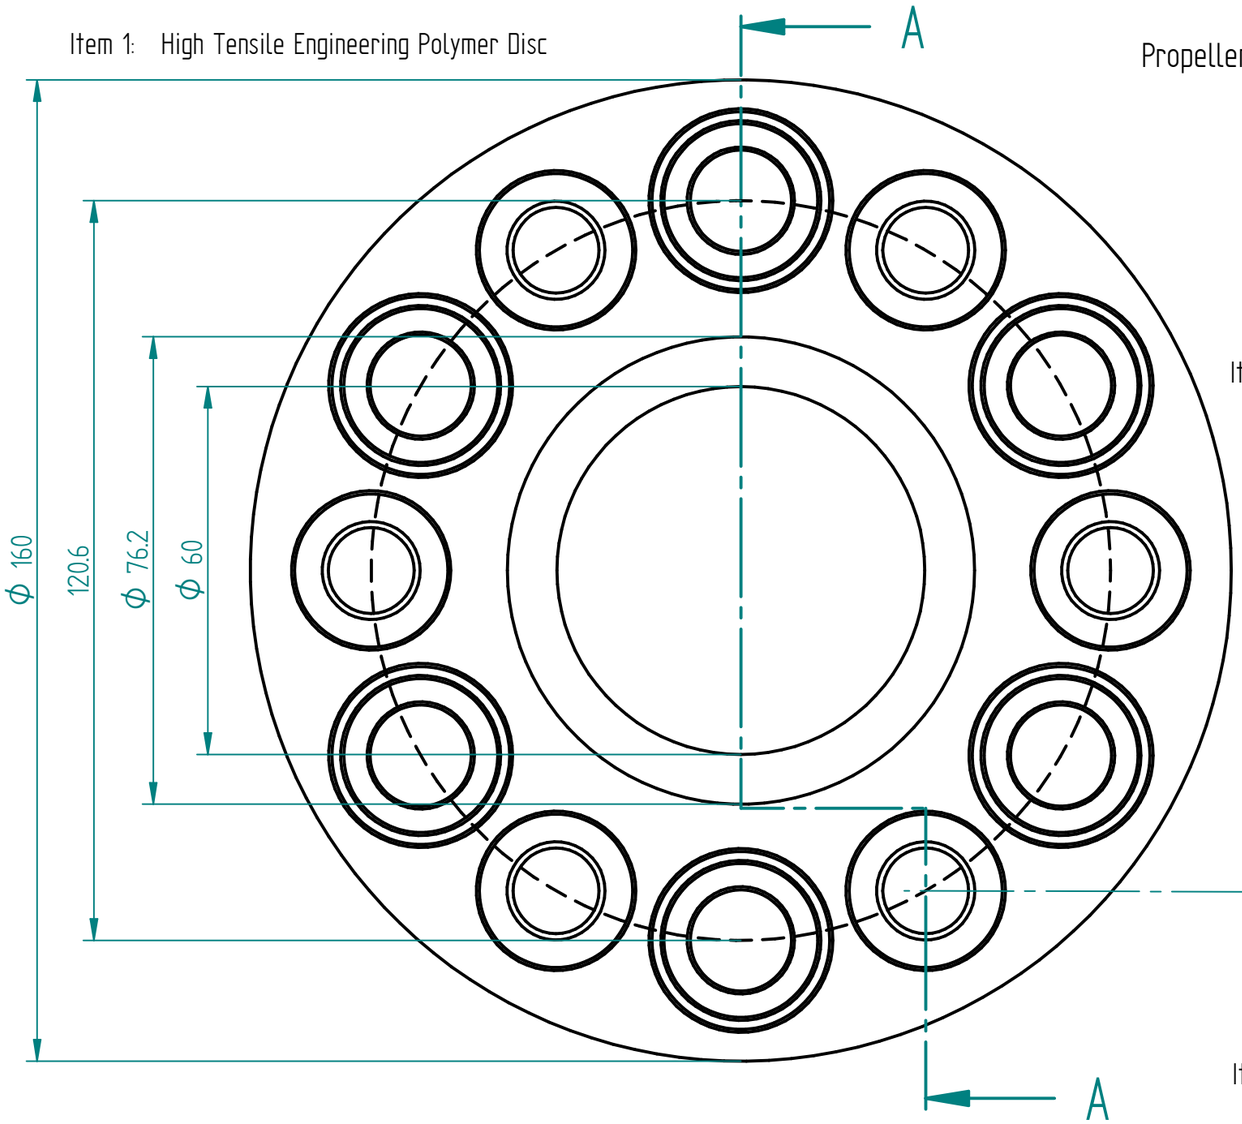

Propeller flange side

Gearbox output flange side

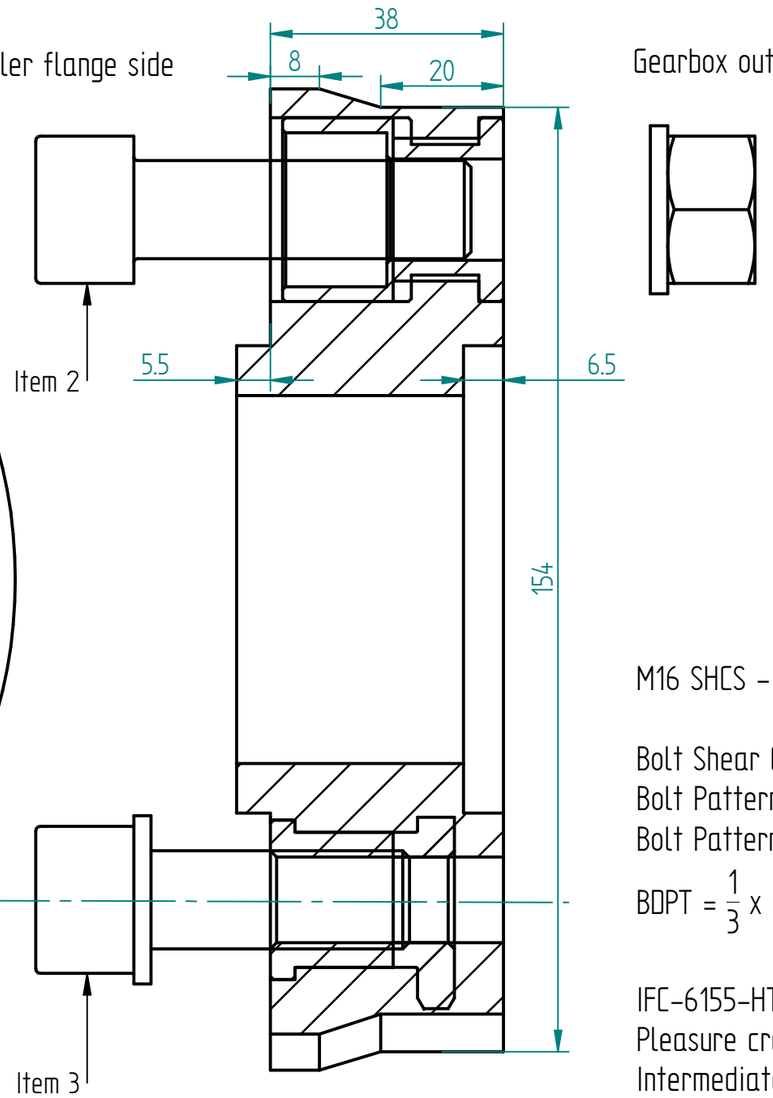

SECTION A–A

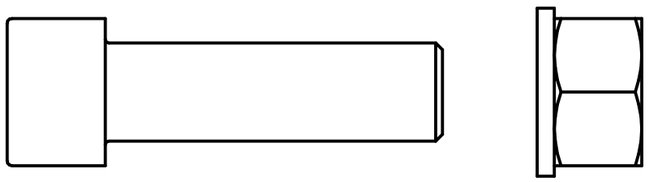

Item 2: M16 x 55 SHCS, Nut and Spring Washer

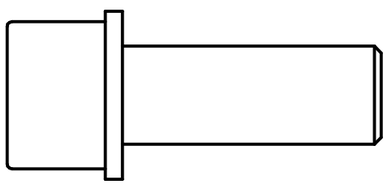

Item 3: M16 x 45 SHCS and Spring Washer

M16 SHCS – AS2465 Grade 8 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 96kN
Bolt Pattern Shear Capacity [BPSC] = 21,946 Nm
Bolt Pattern Design Torque [BPDT] = 7,315 Nm

$$BDPT = \frac{1}{3} \times BPSC$$

IFC-6155-HT Coupling Ratings:
Pleasure craft = 7,245 Nm
Intermediate = 6,405 Nm
Continuous = 4,270 Nm

IFC-6155-HT Coupling Weight = 3.0 kg

IFC-6155-HT

Copyright © 2021 Isoflex Technologies Pty Ltd

TITLE	IFC6155-HT General Arrangement	
	NAME	DATE
DRAWN	Matthew McCart	15/Jan/21
CHECKED	–	–
APPR	–	–

IsoFlex™ MINIMIZING VIBRATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	SIZE	DWG NO	REV
	A3	IFC6155-HT	B3
	FILE NAME: IFC6155-HT_B3.dft		
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1