

Precision steel male & female spigot inserts moulded into polymer disc.
 Gearbox Spigot ID: 69mm
 Flange Spigot / Polymer ID: 74mm


3/4" UNC Bolt - AS2465 Grade 8 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 126kN
 Bolt Pattern Shear Capacity [BPSC] = 112,014 Nm
 Bolt Pattern Design Torque [BPDT] = 28,004 Nm


$$BDPT = \frac{1}{4} \times BPSC$$

IFC-8534-95 Coupling Ratings:
 Intermediate = 12,750 Nm
 Continuous = 8,500 Nm

IFC-8534-95 Coupling Weight = 10.9 kg

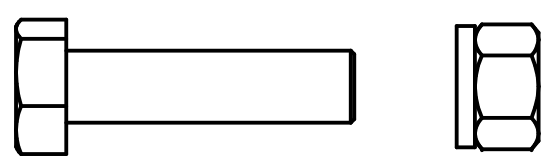


Item 2: 3/4" UNC x 3" Hex Head Bolt, Nut and Spring Washer

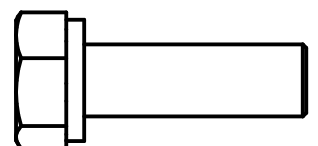

Item 3: 3/4" UNC x 2 1/2" Hex Head Bolt and Spring Washer

IFC-8534-95



Copyright © 2020 Isoflex Technologies Pty Ltd				
TITLE		IFC8534-95 General Arrangement		
	NAME	DATE		
DRAWN	Matthew McCart	04/Sep/20		
CHECKED	-	-		
APPR	-	-		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		SIZE	DWG NO	REV
		A3	IFC8534-95	B1
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE				
SCALE: 1:2		WEIGHT:		SHEET 1 OF 1

