

Item 1: High Tensile Engineering Polymer Disc


M14 SHCS – AS2465 Grade 8 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 74kN
 Bolt Pattern Shear Capacity [BPSC] = 62,900 Nm
 Bolt Pattern Design Torque [BPDT] = 15,725 Nm

$$BDPT = \frac{1}{4} \times BPSC$$


IFC-10325-HT Coupling Ratings:
 Pleasure craft = 8,500 Nm
 Intermediate = 7,500 Nm
 Continuous = 5,000 Nm

IFC-10325-HT Coupling Weight = 5.0 kg




Item 2: M14 x 65 SHCS, Nut and Spring Washer


IFC-10325-HT



Item 3: M14 x 45 SHCS and Spring Washer

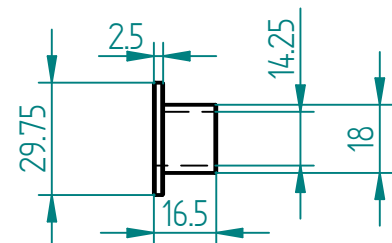

Item 4: 14mm to 18mm steel bush kit supplied



Copyright © 2020 Isoflex Technologies Pty Ltd				
TITLE		IFC10325-HT General Arrangement		
	NAME	DATE		
DRAWN	Matthew McCart	07/Oct/20		
CHECKED	-	-		
APPR	-	-		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		SIZE	DWG NO	REV
		A3	IFC10325-HT	B1
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE				
SCALE: 1:2		WEIGHT:		SHEET 1 OF 1

