


M16 SHCS - AS2465 Grade 8 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 96kN
 Bolt Pattern Shear Capacity [BPSC] = 21,946 Nm
 Bolt Pattern Design Torque [BPDT] = 5,486 Nm


$BDPT = \frac{1}{4} \times BPSC$

IFC-6150-95 Coupling Ratings:
 Pleasure craft = 5,175 Nm
 Intermediate = 4,575 Nm
 Continuous = 3,050 Nm

IFC-6150-95 Coupling Weight = 3.1 kg

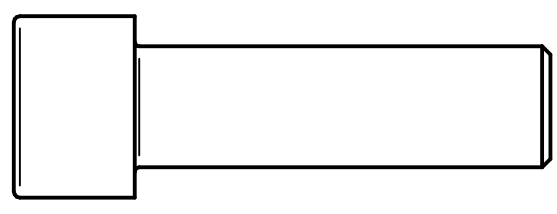


Item 2: M16 x 55 SHCS, Nut and Spring Washer

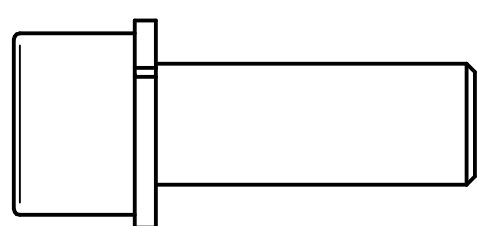

Item 3: M16 x 45 SHCS and Spring Washer

IFC-6150-95



Copyright © 2020 Isoflex Technologies Pty Ltd				
TITLE		IFC6150-95 General Arrangement		
	NAME	DATE		
DRAWN	Matthew McCart	16/Dec/20		
CHECKED	-	-		
APPR	-	-		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		SIZE	DWG NO	REV
		A3	IFC6150-95	B2
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE		FILE NAME: IFC6150-95_B2.dft		
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1		

