

3/8" UNF Hex Bolts - AS2465 Grade 5 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 27kN  
 Bolt Pattern Shear Capacity [BPSC] = 4,286 Nm  
 Bolt Pattern Design Torque [BPDT] = 1,072 Nm

$$BDPT = \frac{1}{4} \times BPSC$$

IFC-4800-95 Coupling Ratings:


Pleasure craft = 525 Nm

Intermediate = 465 Nm


Continuous = 310 Nm

IFC-4800-95 Coupling Weight = 0.7 kg


# IFC-4800-95

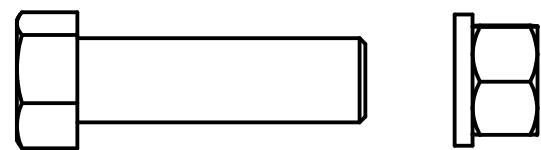

Item 2: 3/8" UNF x 1 1/2" Hex Bolt, Nut and Spring Washer

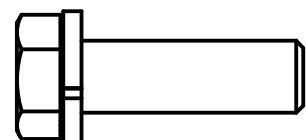

Item 3: 3/8" UNF x 1 1/4" Hex Bolt and Spring Washer



Copyright © 2020 Isoflex Technologies Pty Ltd				
TITLE		IFC4800-95 General Arrangement		
	NAME	DATE		
DRAWN	Matthew McCart	16/Nov/20		
CHECKED	-	-		
APPR	-	-		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS			SIZE A3	DWG NO IFC4800-95
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE			SCALE: 1:1	WEIGHT: SHEET 1 OF 1
			REV B1	FILE NAME: IFC4800-95 General Arrangement_B1.dft